
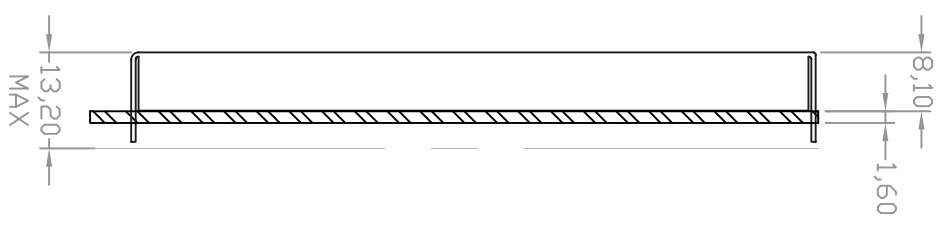



REV 版本	DESCRIPTION 描述	DATE 日期
VER: 2.0		2013-1-18

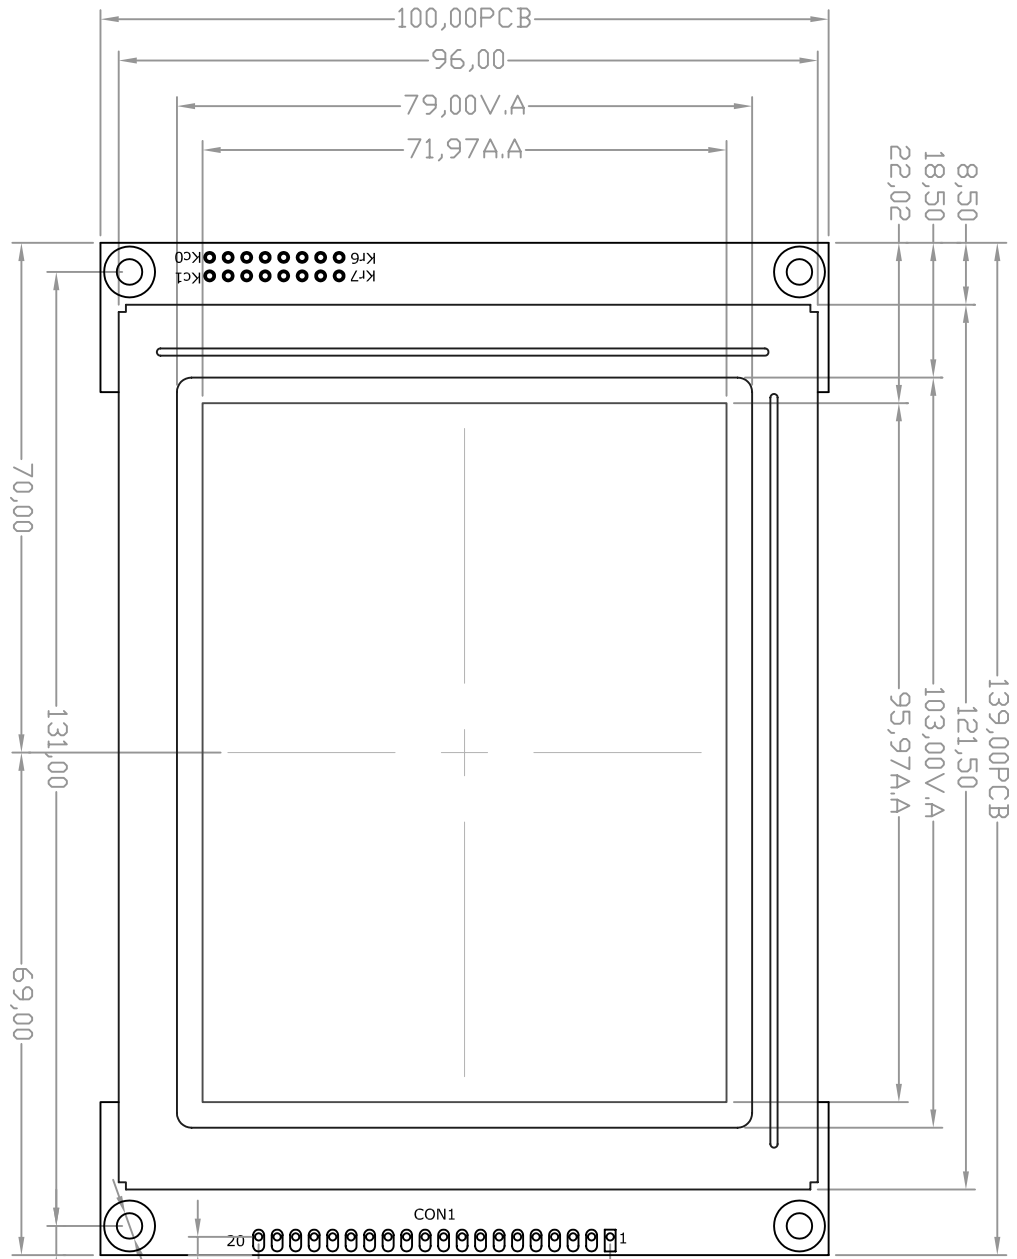

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	/WR
6	/RD
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	RESET
16	/CS
17	BUSY
18	VEE
19	LED+
20	LED-

Specification:

- 1). Driving: Duty: 1/240, Bias:1/16
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/BLUE
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: RA8806
- 6). B/L: white



深圳市新电恒信科技有限公司

GENERAL TOL: ±0,5	UNIT mm	SCALE: FIT	SHEET: PROJECTION	1 OF 1
APPROVALS	DATE	MODEL NUMBER		C/D
App:		SM320240D00		SM320240D00-01
CHK:				
DWNI:		DO NOT SCALE THIS DRAWING.		